




G-6001 **Industrial Spark Plug**

Our massive quad electrode design has been developed to achieve extreme life time in open chamber applications, with lifetime runs over 10,000* hours in Jenbacher type 3 engines. Ideal for engines fueled by Natural Gas and Biogas where the end user is looking for a suitable and capable OE replacement spare part. The new ground electrode design is introduced for easy re-gapping operation while the improved shell and insulator design provides added robustness against mechanical damage.

* Lifetime depends on operating conditions including, but not limited to: fuel, duty cycle/load, ignition system, and environmental conditions.

G-6001

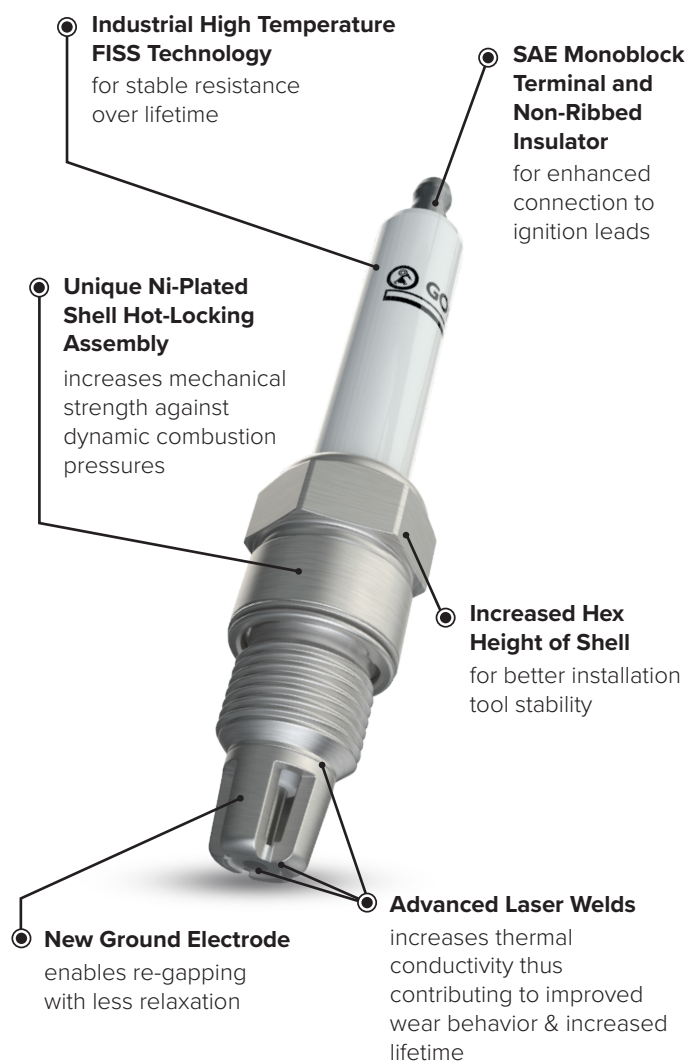

Lifetime*

10,000 h	25,000 h
----------	----------

Electrode Gap, nom.

0.2 mm	0.35 mm	0.5 mm
--------	---------	--------

Sup. Resistor


2 k Ω	3 - 12 k Ω	16 k Ω
--------------	-------------------	---------------

* Lifetime depends on operating conditions including, but not limited to: fuel, duty cycle/load, ignition system, and environmental conditions.

Basic Technical Data

Properties	G-6001
Suppressor Resistor	3 - 12 k Ω
Hex	22.2 mm (7/8 in)
Thread	M18 x 1.5
Thread length	17.1 mm (43/64 in)
Precious metals	Iridium/Platinum
Electrode gap	nom 0.35 mm (0.014 in)
Tightening torque (cast iron)	50-60 Nm (37-44 lbf ft) w/o lubricant
Lifetime*	~10,000 hours

Dimensions

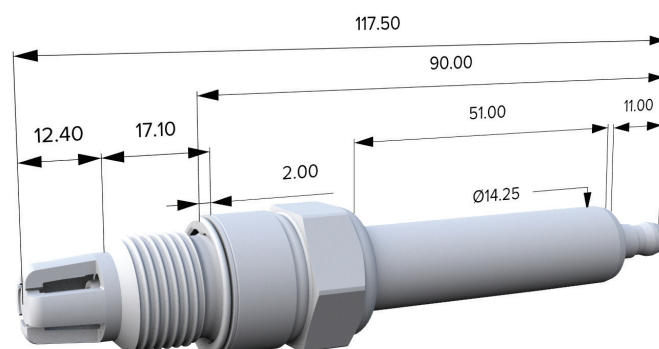

Target Applications

- Industrial stationary engines
- Power generation/CHP
- Open chamber combustion engines
- Heavy-duty start/stop operation
- Natural Gas
- Biogas

Engines

- Innio Jenbacher Type 3

Cross References

- Innio Jenbacher - P7-Series